


Required components:

- QW-DGB1**
- QW-DGB2** Door Glazing Beads
- QW-DGB3**
- QW-DBM1** Door Bolection Moulding
- QW-RD40** Door Rain Deflector
- 44 mm** Standard Door Blanks
- 58 mm**

Timber composite decorative moulding for use on both exterior and interior door panels from OH Industri A/S:



Thickness mm	U-Value W/m ² K	Core material	Dimension mm	Cut down to mm
44	1.28	Polystyrene	935 x 2,150	715 x 1,750
			1,155 x 2,400	935 x 2,000
58	0.98	Polystyrene	935 x 2,150	715 x 1,750
			1,155 x 2,400	935 x 2,000

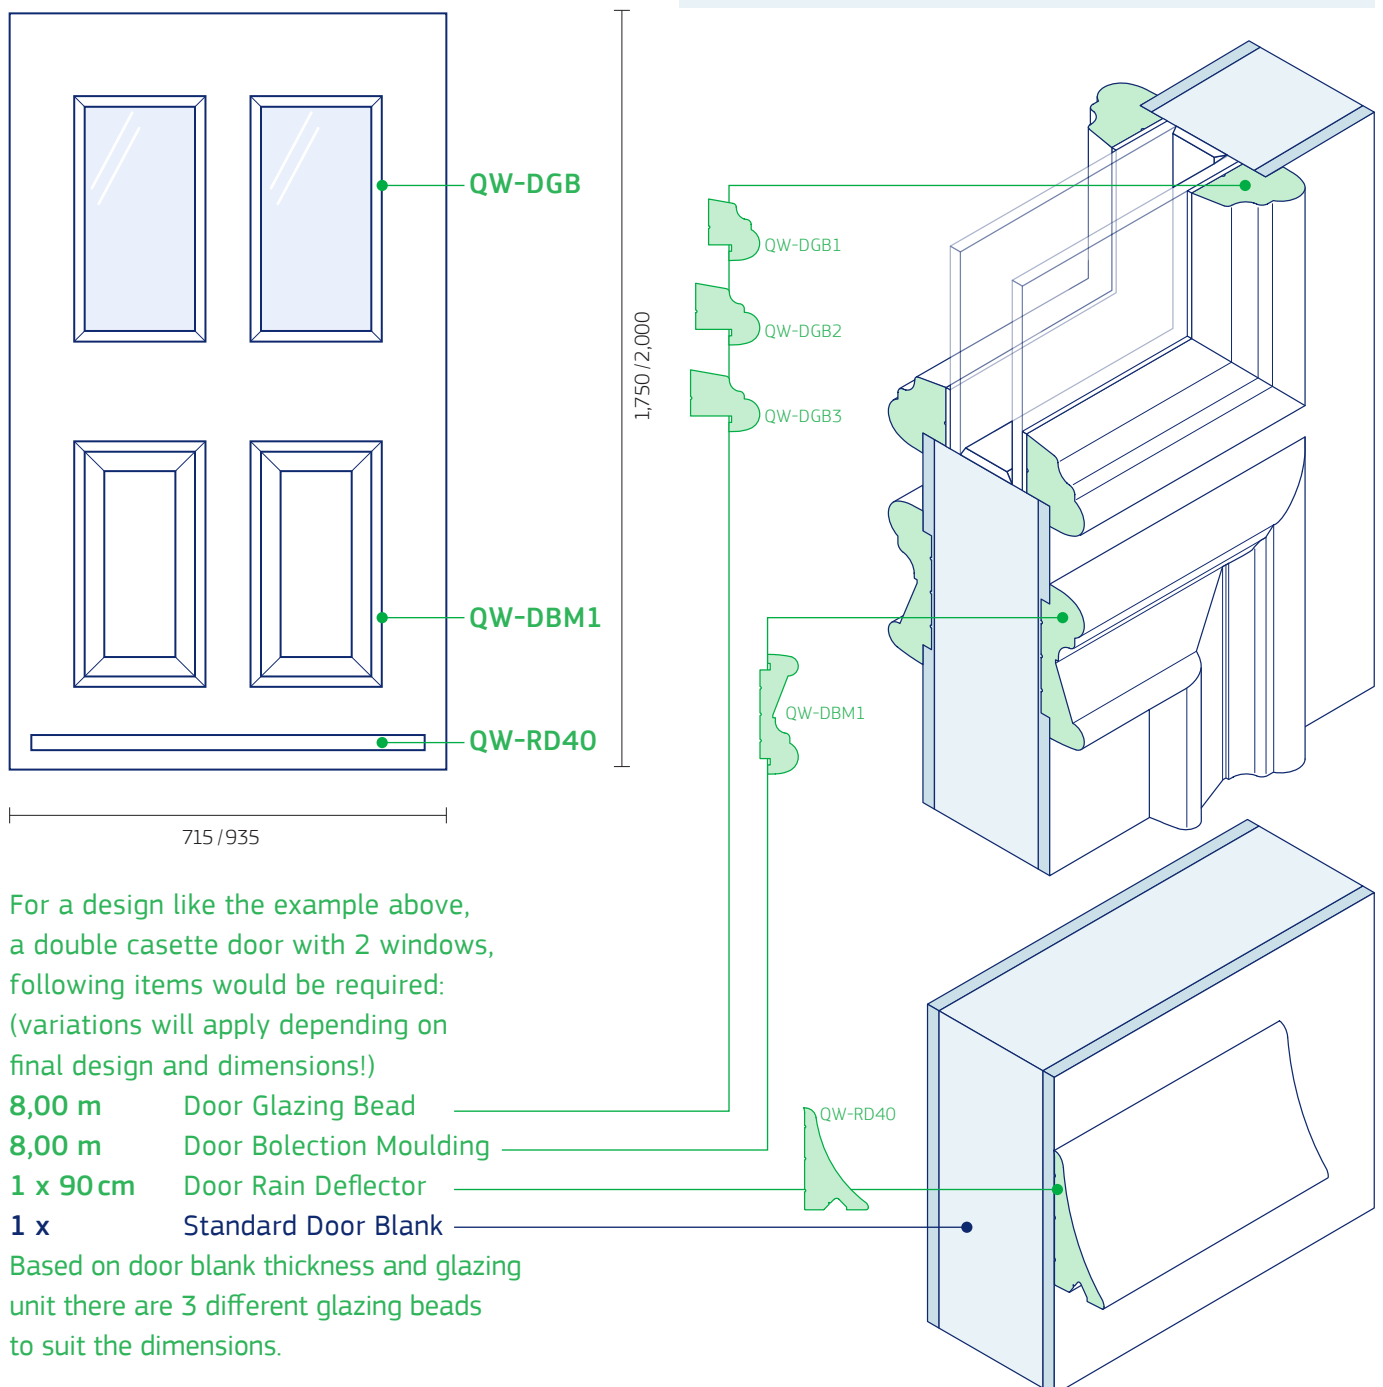

For a design like the example above, a double cassette door with 2 windows, following items would be required: (variations will apply depending on final design and dimensions!)

- 8,00 m** Door Glazing Bead
- 8,00 m** Door Bolection Moulding
- 1 x 90cm** Door Rain Deflector
- 1 x** Standard Door Blank

Based on door blank thickness and glazing unit there are 3 different glazing beads to suit the dimensions.