

Panels HDF/HDF

Construction:	4 mm HDF	(Appr. 970 kg/m ³ - heat conductivity: 0,13 W/mK)
	Insulation - Polystyrene	(Appr. 33 kg/m ³ - heat conductivity: 0,035 W/mK)
	4 mm HDF	(Appr.970 kg/m ³ - heat conductivity: 0,13 W/mK)

U-Value:

U-Value - W/m ² K									
23 mm	24 mm	26 mm	28 mm	36 mm	38 mm	45 mm	46 mm	50 mm	55 mm
1,49	1,42	1,31	1,22	0,95	0,90	0,76	0,74	0,68	0,62

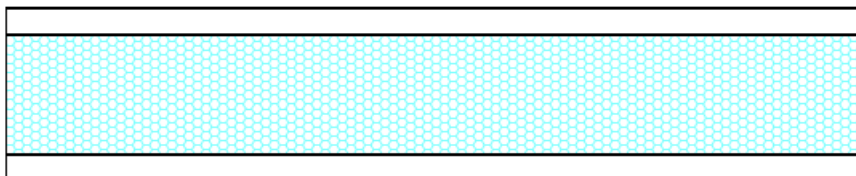
Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.

Weight:

Weight appr. Kg./m ²									
23 mm	24 mm	26 mm	28 mm	36 mm	38 mm	45 mm	46 mm	50 mm	55 mm
8,3	8,4	8,4	8,5	8,8	8,9	9,2	9,2	9,4	9,6

Measure: Min.: 120 x 250 mm - Max.: 1200 x 2400 mm

Tolerances: Width/Height: +/- 1 mm - Diagonal: +/- 1,5 mm - Thickness: +/- 0,8 mm

Section drawing:


Made: 17.03.14	Data sheet: PMN	Draw.: HMN
Revised: 29.10.14	Data sheet: PMN	Draw.:

O.H.Industri A/S
Smedevej 17
DK - 7430 Ikast
+45 9725 1200
www.ohindustri.com