

Timber Composite Fire door 44 mm - FD30

Door blank with Chen-Chen veneer - Massive Plywood

Construction:

- 1,5 mm Chen-Chen veneer
- 1,5 mm Cross grain veneer
- 1,5 mm Long grain veneer
- 0,3 mm Aluminium - moisture barrier - stabilizer
- 1,5 mm Long grain inner veneer
- Insulation - Massive Plywood
- 1,5 mm Long grain inner veneer
- 0,3 mm Aluminium - moisture barrier - stabilizer
- 1,5 mm Long grain veneer
- 1,5 mm Cross grain veneer
- 1,5 mm Chen-Chen veneer

U-Value:

U-Value - W/m ² K	
44 mm	
1,9 (Calculated, not tested)	

Size 1000 mm x 2000 mm

Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.

Weight:

Weight appr. Kg./m ²	
44 mm	
24,5 (Calculated, not tested)	

Size 1000 mm x 2000 mm


Measure:

Stock sizes: 935 x 2150 mm - 1155 x 2400 mm

Tolerances:

Width/Height: +/- 1 mm - Diagonal: +/- 2 mm - Thickness: +/- 0,8 mm

Section drawing: Stiles: 150 mm pine / Rails: No (plywood core)

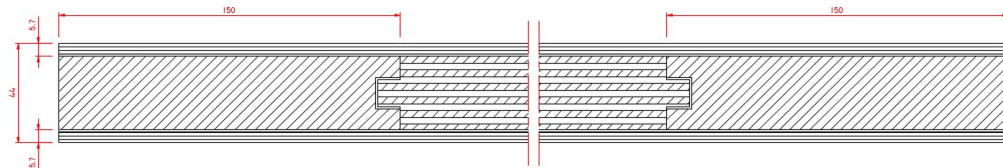

Made: 09.05.2019	Data sheet: CRS	Draw.: CRS
Revised: 28.11.2019	Data sheet: CRS	Draw.: CRS

O.H.Industri A/S
Smedevej 17
DK - 7430 Ikast
+45 9725 1200
www.ohindustri.com