

Panels HDF/HDF

Construction:	4 mm HDF	(Appr. 970 kg/m ³ - heat conductivity: 0,13 W/mK)
	Insulation - Polystyrene	(Appr. 33 kg/m ³ - heat conductivity: 0,035 W/mK)
	4 mm HDF	(Appr.970 kg/m ³ - heat conductivity: 0,13 W/mK)

U-Value:	U-Value - W/m ² K											
	23 mm	24 mm	26 mm	28 mm	36 mm	38 mm	41 mm	43 mm	45 mm	46 mm	50 mm	55 mm
	1,51	1,45	1,34	1,25	0,97	0,92	0,85	0,81	0,78	0,76	0,70	0,64


Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.

Weight:	Weight appr. Kg./m ²											
	23 mm	24 mm	26 mm	28 mm	36 mm	38 mm	41 mm	43 mm	45 mm	46 mm	50 mm	55 mm
	8,3	8,3	8,4	8,4	8,7	8,8	8,9	8,9	9,0	9,0	9,2	9,3

Measure: Min.: 120 x 250 mm - Max.: 1200 x 2400 mm

Tolerances: Width/Height: +/- 1 mm - Diagonal: +/- 1,5 mm - Thickness: +/- 0,8 mm

Section drawing:

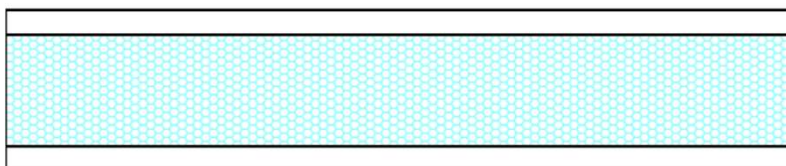

Made: 17.03.2014	Data sheet: PMN	Draw.: HMN
Revised: 02.12.2016	Data sheet: CRS	Draw.: HMN

O.H.Industri A/S
Smedevej 17
DK - 7430 Ikast
+45 9725 1200