

Panels 15 mm Oak/15 mm Oak - SBD 4

Construction: 15 mm Laminated Oak (Appr.750 kg/m³ - heat conductivity: 0,18 W/mK)
 Insulation - Polystyrene/2 x 4 mm Plywood
 15 mm Laminated Oak (Appr.750 kg/m³ - heat conductivity: 0,18 W/mK)

U-Value:	U-Value - W/m²K
	45 mm
	1,51


Heat conductivity is calculated on the basis of the practical heat conductivity of each included material - taken from data sheets and DS418, version 6, 2002. Also relating to EN 12524.

Weight:	Weight appr. Kg./m²
	45 mm
	26,6

Measure: 1030 x 2250 mm

Tolerances: Width/Height: +/- 1 mm - Diagonal. +/- 2 mm - Thickness: +/- 0,8 mm

Section drawing:

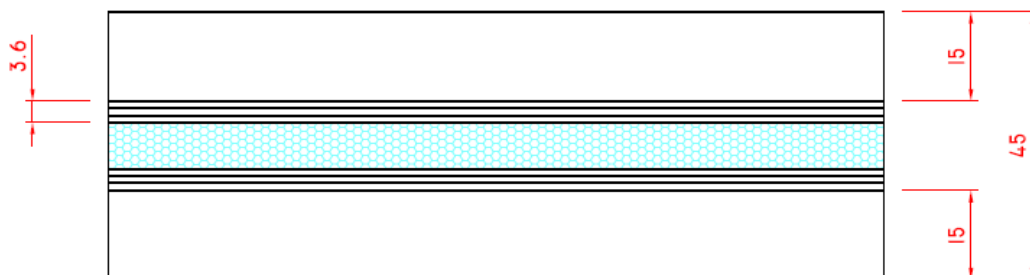

Made: 05.03.14	Data sheet: PMN	Draw.: HMN
Revised:	Data sheet:	Draw.:

O.H.Industri A/S
 Smedevej 17
 DK - 7430 Ikast
 +45 9725 1200
www.ohindustri.com