



**Timber Composite
Insulated Door Blanks
Low Energy 68mm**



Doors designed to meet the Passive House standard for energy efficiency and thermal performance.

Achieve a low U-Value with XPS Low Energy doors without increasing the thickness of the doors.

Made to measure performance with a choice of stiles and rails sizes.




Product Data


Specification	Stiles/Rails mm	Thickness mm	U-Value W/m ² K*	Core material	Weight kg/m ²	Max Size mm
Door blank with Chen-chen veneer	55	68	0.62	Polystyrene	13.8	1,200 x 2,400
Door blank with ChenChen veneer 55 mm or 110mm stiles and rails in pine.	110	68	0.77	Polystyrene	17.7	1,200 x 2,400

55mm Stiles and Rails

Section view

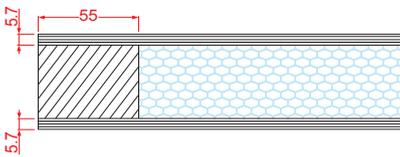


Front view

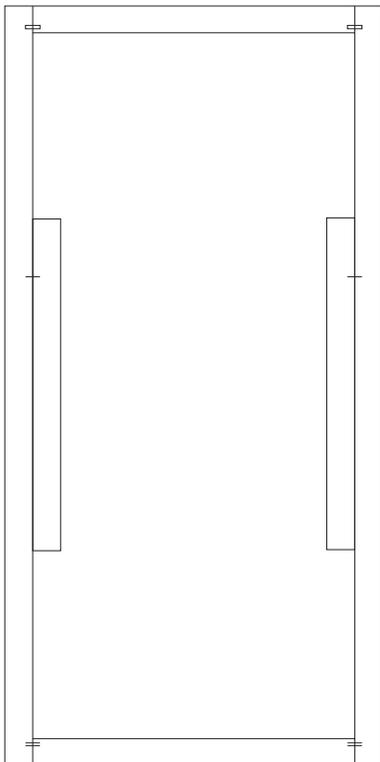

110mm Stiles and Rails

Section view

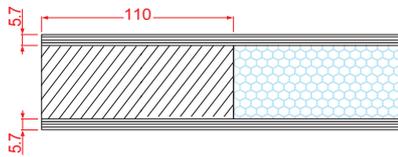

Front view

